
st-safe

driven by fluids

23-1503-210

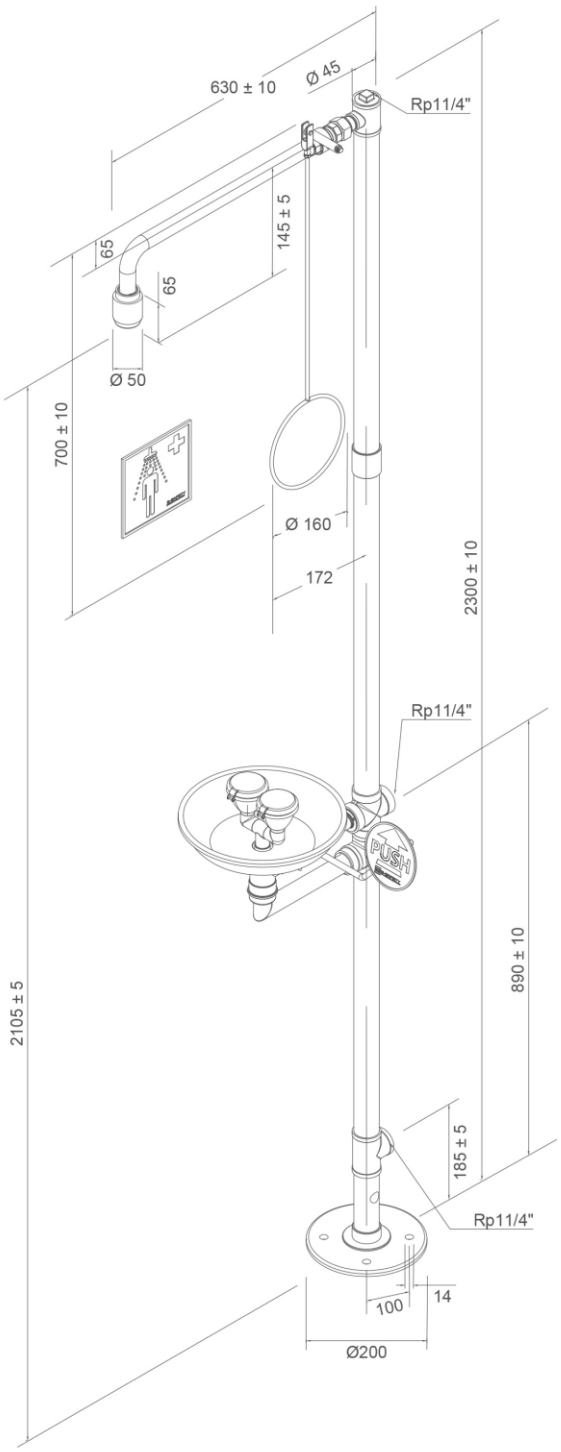

T +31(0)38 421 55 22
E info@safestream.nl
W www.safestream.nl

Lichterweg 31, NL-8042 PW Zwolle
KvK Zwolle 05044000
BTW NL0089.11.642.B01

ABN AMRO 420447067
IBAN NL05 ABNA 0420 4470 67
BIC ABNANL2A

st-safe

driven by fluids

Technical description

PremiumLine body safety shower with eye shower with stainless steel bowl, draining of the eye shower over the stand pipe, floor mounted
- including top and bottom water inlet 1 ¼" female for installation in circulation lines, plug 1 ¼" of stainless steel
- base plate with 4 mounting holes of stainless steel, polished, diameter 200 mm
- stand pipe 1 ¼" of stainless steel three-part, polished, with top and bottom water inlet 1 ¼" female, total height 2300 mm
- connection piece of stainless steel, for easy installation and alignment of the shower
- ball valve ¾" of stainless steel, with quick connect system and pull rod actuation, DIN-DVGW tested and certificated
- pull rod with ring handle of stainless steel, polished, length 700 mm
- wall shower arm ¾" of stainless steel, polished, projection 630 mm
- integrated automatic flow regulation 50 l/min. for a spray pattern acc. to the norms at a specified operating range of 1.5 to 3 bar dynamic water pressure
- high-performance shower head, with improved spray pattern, corrosion resistant, largely free of calcification-and maintenance, very robust, self-draining
- sign for body safety and eye shower according to EN ISO 7010 und ASR A1.3, 150 x 150 mm, viewing distance 15 metre
- integrated PremiumLine safety eye shower with stainless steel bowl
- connection pipe of stainless steel for easy installation and alignment of the shower, polished
- ball valve ½" of stainless steel, with PUSH-lever actuation, DIN-DVGW tested and certificated
- big push plate made of stainless steel, polished, length 240 mm, with large signal "PUSH", luminescent according to DIN 67510
- integrated flow regulation 14 litre / minute for a standard-compliant jet pattern at a specified working range of 2.5 to 5 bar flow pressure
- high-performance spray heads made of stainless steel for large-scale dispersion of water, with plastic spray plate, largely free of calcification, with rubber sleeves and sealed dust caps with folding mechanism, mounted over distributor fork
- bowl made of stainless steel, diameter 275 mm, polished, water outlet 1 ¼" male
- according to BGI/GUV-I 850-0, DIN 1988 and EN 1717
- according to ANSI Z358.1-2014, EN 15154-1:2006, EN 15154-2:2006 and EN 15154-5:2019
- DIN-DVGW tested and certificated

Manufacturer: ST-Safe
Article-No.: 23-1503-210

Technical specifications

Minimum flow pressure:	1.5 bar
Operating pressure:	1.5 to 3 bar
Flow rate body shower:	50 l/min
Water inlet:	1 ¼" female
Dimensions: (H x W x D):	2300 x 400 x 630 mm

Technical specifications eye shower:	
Minimum flow pressure:	2.5 bar
Operating pressure:	2.5 to 5 bar
Flow rate:	14 l/min
Water outlet:	1 ¼" male

Compliance with standards	Approvals
- EN 15154-1:2006	- DIN-DVGW, DVGW, NW-0416CL0425
- EN 15154-2:2006	- DIN-DVGW, DVGW, NW-0417CL0263
- EN 15154-5:2019	
- ANSI Z358.1-2014	

T +31(0)38 421 55 22
E info@safestream.nl
W www.safestream.nl

Lichterweg 31, NL-8042 PW Zwolle
KvK Zwolle 05044000
BTW NL0089.11.642.B01

ABN AMRO 420447067
IBAN NL05 ABNA 0420 4470 67
BIC ABNANL2A

st-safe

driven by fluids

Material overview	Material	Material description
High-performance shower head:	plastic	AISI 316
Ball valve:	stainless steel	AISI 316
Flow regulator:	plastic POM	-
Piping:	stainless steel	AISI 316
Pull rod with ring handle:	stainless steel	AISI 316
T-pieces, sleeve, plug:	stainless steel	AISI 316
Base plate:	stainless steel	AISI 316
Sign for body safety shower:	plastic	-
Eye shower:	stainless steel	AISI 316
Ball valve eye shower:	stainless steel	AISI 316
Bowl eye shower:	stainless steel	AISI 304
Drain tube eye shower:	stainless steel	AISI 316
Flow regulator eye shower:	plastic POM	-
Spray head eye shower:	stainless steel, plastic POM, EPDM	AISI 316

Product overview	
23-1503-210	PremiumLine body safety shower with eye shower with stainless steel bowl, draining of the eye shower over the stand pipe, floor mounted - flow rate 50 l/min (hazard class I according to EN 15154-5:2019)
23-1503-210/ 75L	PremiumLine body safety shower with eye shower with stainless steel bowl, draining of the eye shower over the stand pipe, floor mounted - flow rate 75 l/min / 20 GPM (hazard class II according to EN 15154-5:2019)
23-1503-210/ 110L	PremiumLine body safety shower with eye shower with stainless steel bowl, draining of the eye shower over the stand pipe, floor mounted - flow rate 110 l/min (hazard class III according to EN 15154-5:2019)

T +31(0)38 421 55 22
E info@safestream.nl
W www.safestream.nl

Lichterweg 31, NL-8042 PW Zwolle
KvK Zwolle 05044000
BTW NL0089.11.642.B01

ABN AMRO 420447067
IBAN NL05 ABNA 0420 4470 67
BIC ABNANL2A