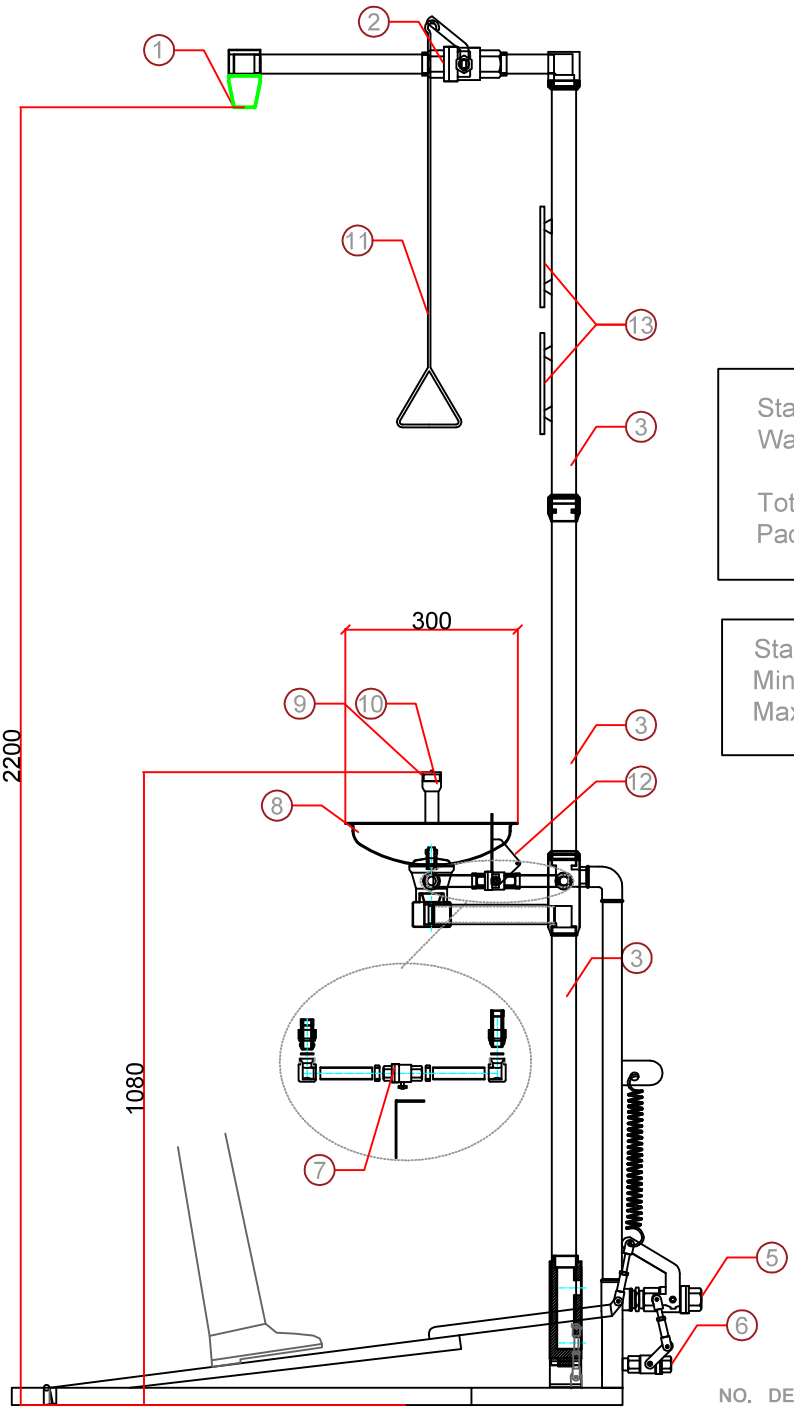

Standards: EN 15154-1-2
Water Flow: 75,7 lt / min for Shower
11,4 lt/min for eye wash
Total Weight: 40 kgs
Packed Dimensions:71x101x27 cm

Static test pressure : 7 bar
Min using pressure : 1,4 bar
Max using pressure : 2,8 bar

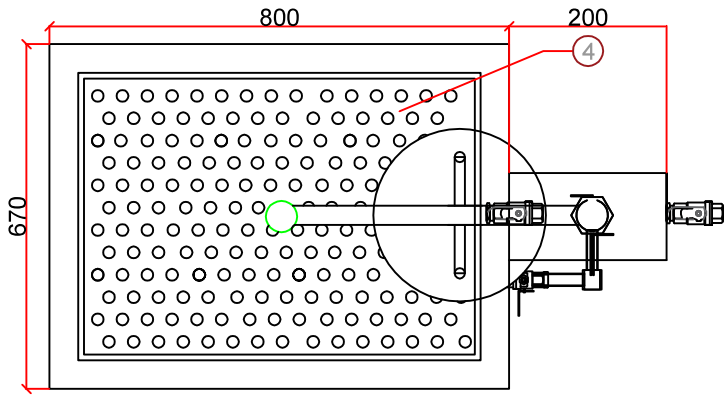

-top view-

NO.	DESCRIPTION	MATERIAL
13	Emergency Sign	Phosphorus
12	Push Handle Control for Eyewash	Stainless Steel 304
11	Pull rod control for Shower	Stainless Steel 304
10	Spray Nozzles	Brass
9	Dust Cover on Eyewash Spray	Plastic
8	Eyewash Bowl	Stainless Steel 304
7	1/2" Ball Valve	Stainless Steel 304
6	Water Outlet 1/2", Frost Protection	Stainless Steel 304
5	Water Inlet 1"	Stainless Steel 304
4	Platform Control for Non-freeze	Stainless Steel 304
3	Pipes	Stainless Steel 304
2	1" Ball Valve	Stainless Steel 304
1	Shower head	Polyethylene(Green)

REV.	DATE	DESCRIPTION	DESIGNED	CHECKED	APPROVED
A		FIRST ISSUE	SS	FA	ST

CUSTOMER

STATUS: FOR INFORMATION ☐ FOR REVIEW ☐ FOR APPROVAL ☐ FOR RFQ/DESIGN ☒

ORIGINAL EDITION		
DESIGNED	✓	SS
CHECKED	✓	FA
APPROVED	✓	ST

SIZE: A4 SCALE: 1/100

PRODUCT: Combined Unit, ISTEC Type ESW
Pedestal Type With Platform for Non-Freeze

IST Isci Sagligi Techizati Sanayi ve Ticaret Ltd Sti
Ostim Melih Gokcek Blv 31 Cadde 2269 sokak 42
Ankara Turkiye 06374 www.ist.com.tr
Ph 0090312 384 13 00 Fax 0090312 341 73 03

DRAWING NUMBER/DATE: 3716/1

SHEET: 1 OF: 1

DRAWING NAME: 23-1503-400