
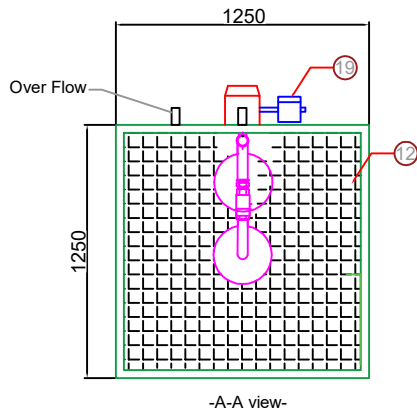
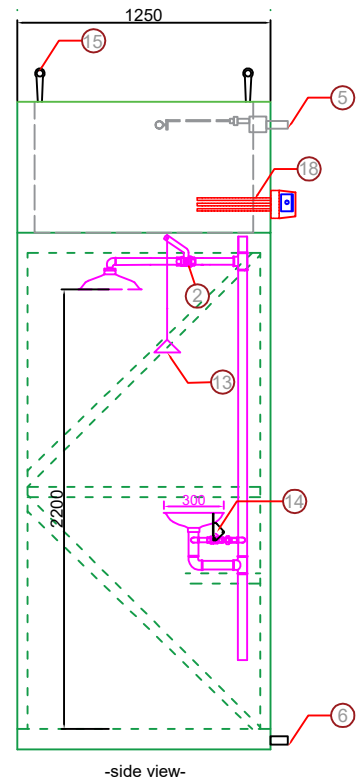


EMERGENCY SHOWER AND EYE/FACE WASH WITH OVERHEAD GALVANIZE WATER TANK (630 lt)

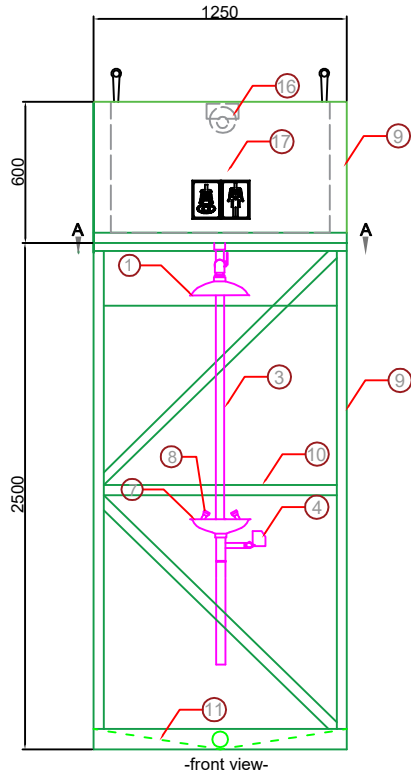

Standards: EN 15154-1-2-3
Water Flow: 75,7 lt / min for Shower
: 11,4 lt/min for eye/face wash
Total Weight:
Packed Dimensions:
Cabinet: 140x140x267 cm
Water Tank: 140x155x90 cm

Static test pressure : 7 bar
Min using pressure : 1,4 bar
Max using pressure : 2,8 bar

NO.	DESCRIPTION	MATERIAL
19	Junction Box	Exproof
18	Immersion Heater	Exproof
17	630 L Water Tank	Galvanized Steel
16	Buoy	Brass
15	Lifting Hook	Galvanized Steel
14	Handle Control for eye/face wash	Stainless Steel 304
13	Pull Rod for shower	Stainless Steel 304
12	Grating	GRP
11	Waste Water Draining Sump	Galvanized Painted
10	Main Frame	Galvanized Painted
9	Side and Back Panels	GRP
8	Spray Nozzles	Stainless Steel 304
7	Eyewash Bowl	Stainless Steel 304
6	Water Outlet 1 1/2"	Galvanized Painted
5	Water Inlet 1" (Female)	Galvanized Steel
4	Push Handle Control for Eyewash	Stainless Steel 304
3	Pipes	Stainless Steel 304
2	1" Ball Valve	Stainless Steel 304
1	Shower head	Stainless Steel 304

TOLERANCE: ± 5 CM

								CUSTOMER							
		A		FIRST ISSUE		SS		FA		ST					
		REV.		DATE		DESCRIPTION		DESIGNED		CHECKED		APPROVED			
STATUS		FOR INFORMATION		FOR REVIEW		FOR APPROVAL		ORIGINAL		EDITION		SIZE		SCALE	
		☐		☐		☒		DESIGNED		SS		A4		1/100	
		☐		☐		☐		CHECKED		FA					
		☐		☐		☐		APPROVED		ST					
										DRAWING NUMBER/DATE:		SHEET:		DRAWING NAME:	
										515/17-1		1		23-1503-500	
												OF:			
												1			