

- Exceeds American National Standard Z358.1 Specifications
- Exceeds European EN 15154-1
- Easily Mounts to Wall
- Galvanized Steel Protected with BradTect® Safety Yellow Coating
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- Classified by Underwriters Laboratory Inc. to ANSI Z358.1
- SpinTec™ showerheads are covered by one or more of the following patents: 8113446; D594,089; D669,555; Reg. Comm. Des. D001079560-0001. Other patents pending.
- Classified by Underwriters Laboratory Inc. to ANSI Z358.1
- Listed by Intertek to EN 15154-1




Specifications

Impact-resistant plastic showerhead is colored bright yellow for high visibility in emergency situations. Shower provides a superior washdown with a more even spray pattern. Shower pull rod is stainless steel. Galvanized steel piping is additionally protected with BradTect® safety yellow coating. Hand-held hose sprayhead contains an antimicrobial agent to protect the sprayhead.

- Installer to supply backflow prevention as required by UPC, IPC and/or local plumbing coded. Contact Bradley or visit bradleycorp.com for available options.*
- Drench shower is designed to accommodate standard 8' ceiling height. ANSI Z358.1 compliant drench showers are mounted between 82"-96" from the lower edge of the showerhead or shroud to the floor.*
- This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.*


Model	Description
<input type="checkbox"/> S19-120P	Drench Shower w/Hose Spray and Horizontal Supply
<input type="checkbox"/> S19-2100	Navigator EFX25 - Emergency Thermostatic Mixing Valve

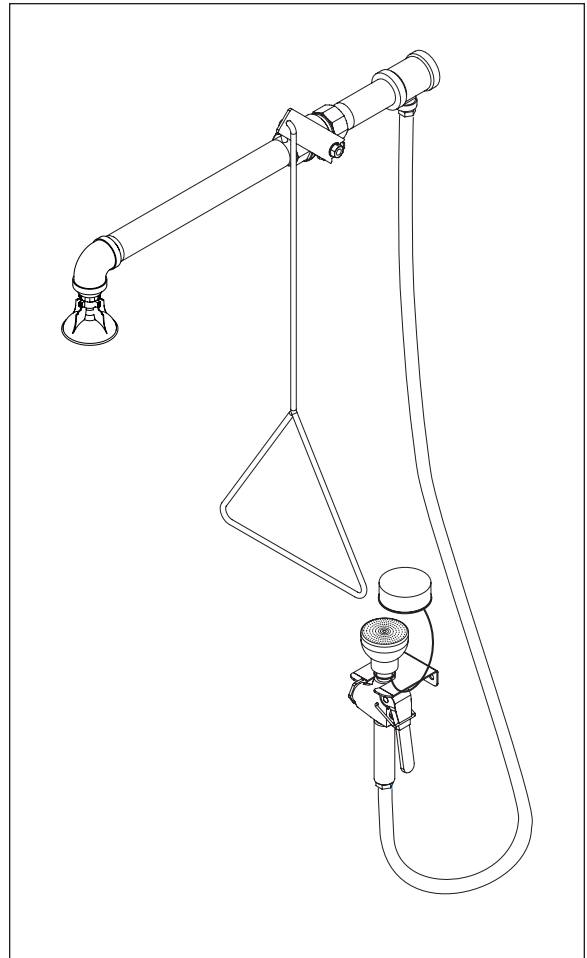

Recommended Option:

Navigator S19-2100 EFX25
Emergency Thermostatic Mixing Valve

NAVIGATOR




Satisfies ANSI Z358.1
tepid water requirements.

Standard Equipment

SpinTec™ Showerhead

3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic for high visibility in emergency situations. SpinTec drench showerhead features integral 22 GPM (83.3 L) flow control, conserving water and helping to accurately size your tepid water system.

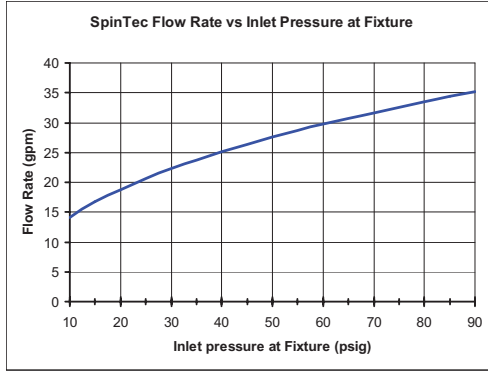

Valve

Chrome-plated brass 1" NPT stay-open valve. Operated by a stainless steel pull rod with triangular handle.

8' Hand-Held Hose Spray

The hose spray attachment acts as a face and/or body rinser. Valve remains open once handle is squeezed. Hose is 8' yellow reinforced thermoplastic with 450 PSI burst strength.

Pipe and Fittings

Galvanized steel with BradTect® safety yellow coating.

Water Supply

1" NPT Horizontal.

