

- Complies with American National Standard Z358.1
- Laboratory Spray Valve
- Highly Visible Yellow-Colored Hose
- Deck-Mounted Units
- Full, One-Year Warranty
- Classified by Underwriters Laboratory Inc. to ANSI Z358.1



Specifications

Perforated sprayhead is ABS plastic and provides soft spray for cleansing eyes and face. Handle stays open once valve is squeezed. Hose is yellow reinforced thermoplastic. Unit is deck-mounted. Operating range is 30–90 psi. Flow rate: 2.4–2.8 gpm. Hand-held hose sprayhead contains an antimicrobial agent to protect the sprayhead.

- ☒ This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.
- ☒ Drench hoses must provide a controlled flushing fluid flow that is both tepid and non-injurious to the user per ANSI Z358.1. Refer to ANSI Z358.1 for complete regulatory information regarding the performance, installation, maintenance, and training requirements for drench hoses.
- ☒ Installer to supply backflow prevention as required by UPC, IPC and/or local plumbing codes. Contact Bradley or visit bradleycorp.com for available options.

Standard Equipment

Sprayhead


Perforated sprayhead is ABS plastic and provides soft spray for cleansing eyes and face. Includes protective sprayhead cover. Integral flow control assures safe, steady flow under varying water supply conditions.

Valve

Chrome-plated brass with extended handle stays open once handle is squeezed.

Drench Hose


8' (2438mm) yellow reinforced thermoplastic hose has 3/8" NPT male thread. Burst strength is 450 PSI.

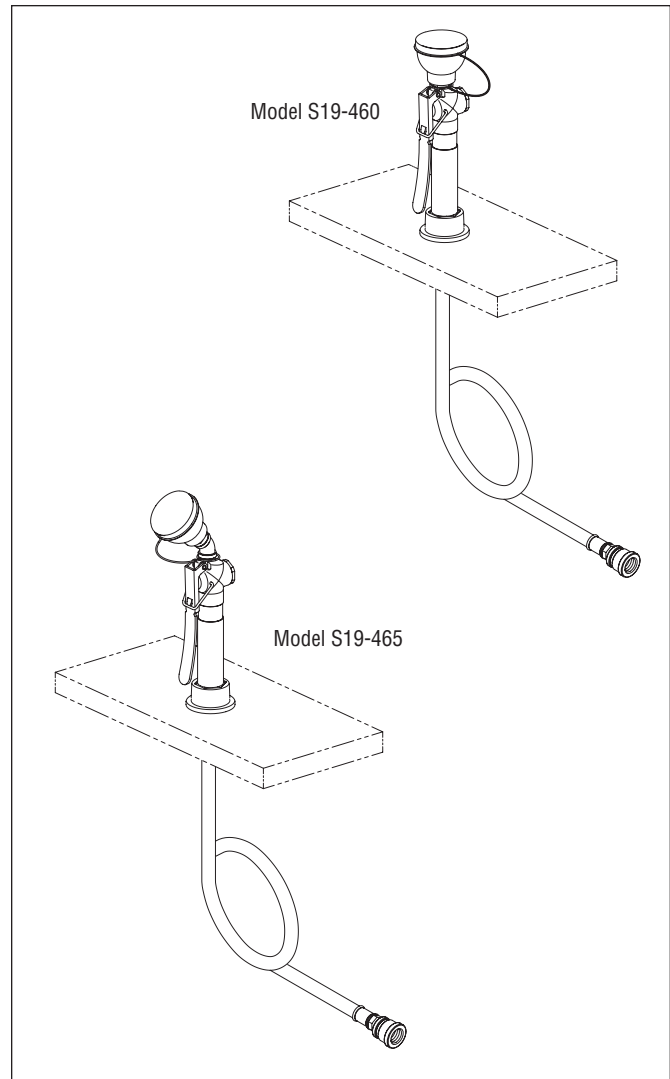

Recommended Option:

Navigator S19-2000 EFX8
Emergency Thermostatic Mixing Valve


NAVIGATOR



Satisfies ANSI Z358.1
tepid water requirements.

Model	Description
<input type="checkbox"/> S19-460	Deck-Mount Hand-Held Hose Spray
<input type="checkbox"/> S19-465	Deck-Mount Hand-Held Hose Spray
<input type="checkbox"/> S27-303	Series 7 Dual-Check Backflow Preventer
<input type="checkbox"/> S45-2309	Series 9 Dual-Check Vacuum Breaker
<input type="checkbox"/> S45-2310	Series 9D Dual-Check Backflow Preventer
<input type="checkbox"/> S19-2000	Navigator EFX8 Emergency Thermostatic Mixing Valve

Model S19-460

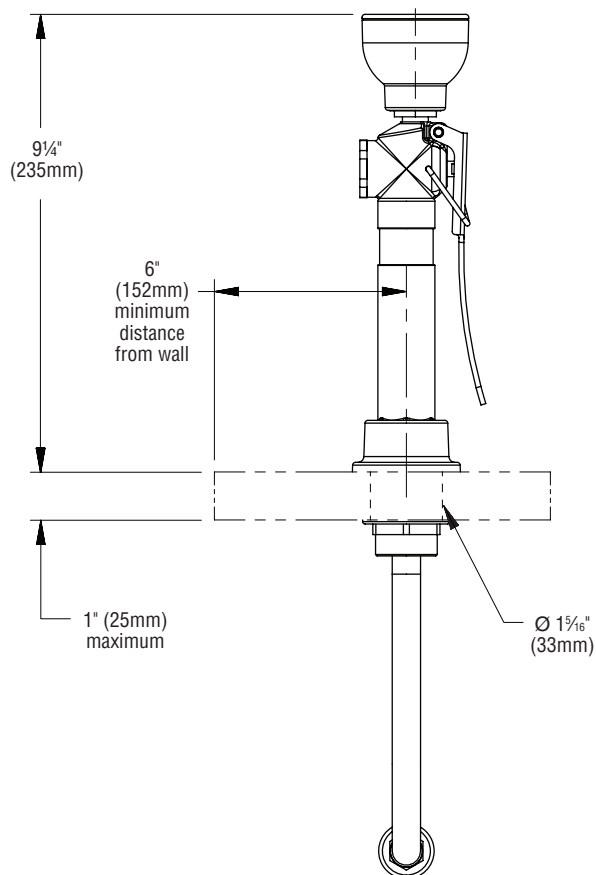

Model S19-465

